

a: Lot 9, 500 Churchill Road
Kilburn South Australia 5084
p: 08 8359 4999
f: 08 8359 4988
e: sales@a-p-r.com.au
w: www.a-p-r.com.au




APR Decking



Tough, durable and versatile, APR decking makes an attractive addition to any modern home.

APR Decking profiles

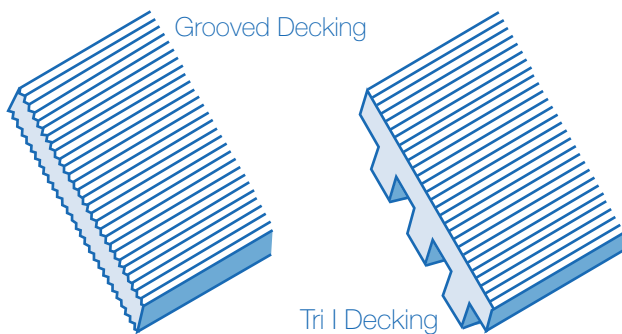

Manufactured in lengths up to 3m

APR Decking Available in two unique profiles!

Traditional timber decking can transform an ordinary backyard, patio or verandah into a modern outdoor entertainment area.

But, over time, the wooden boards can become weathered, often cracking, splintering or even rotting, requiring expensive repairs or replacements.

APR wood plastic composite decking has all the advantages of wood - they're easily cut, drilled and fixed into position - with none of the drawbacks. They're stronger and more durable than wood, and they won't crack, rot, splinter or break.

Available in two profiles - traditional grooved style and Tri I for additional strength with less weight - APR Decking can be custom manufactured to any length up to 3m.

And, because they're made from 100% recycled plastic and wood, each deck diverts hundreds of kilograms of waste material from landfill and saves natural resources at the same time.

So as well as being a stunning, versatile and durable alternative to traditional wood decking, APR Decking is also the perfect conversation starter!

Independent test results from NATA accredited laboratories:

Dry Flexural Testing

Loading speed: 30mm/min Support span: 900mm
Maximum Flexural Strength: 3.86kN // 393.6kgf

Wet Flexural Testing

Loading speed: 30mm/min Support span: 900mm
Maximum Flexural Strength: 3.88kN // 395.6kgf

Screw Withdrawal Testing

Test method: ASTM D6117
Maximum Force face: 1741 MPa

**Call us on (08) 8359 4999,
email sales@a-p-r.com.au
or visit www.a-p-r.com.au**